

# How to configure Hipchat

Testing of HipChat in SIT environment (add user to ursMemberGroup)

## Step-by-step guide

1. Download the latest Atlassian HipChat client <https://www.hipchat.com/downloads> and configure a new account
2. When you launch HipChat client, you'll see a login dialog. That's for the cloud-hosted service. You'll want to add a new local server in HipChat Preferences (select Preferences menu item on menu bar)

### Add Account

Add one of your existing HipChat accounts so you can sign into multiple HipChat accounts, all at the same time.

Trying to create a new account? [Go here.](#)

Email address:

Password:

---

Server:

☐ Require certificate validation

Cancel

Save

No Accounts

+

-




ADD AN ACCOUNT

Apparently, you've removed all your HipChat accounts.  
You'll need to add an account to get back to work.

Add account

[Sign up for a new account](#)

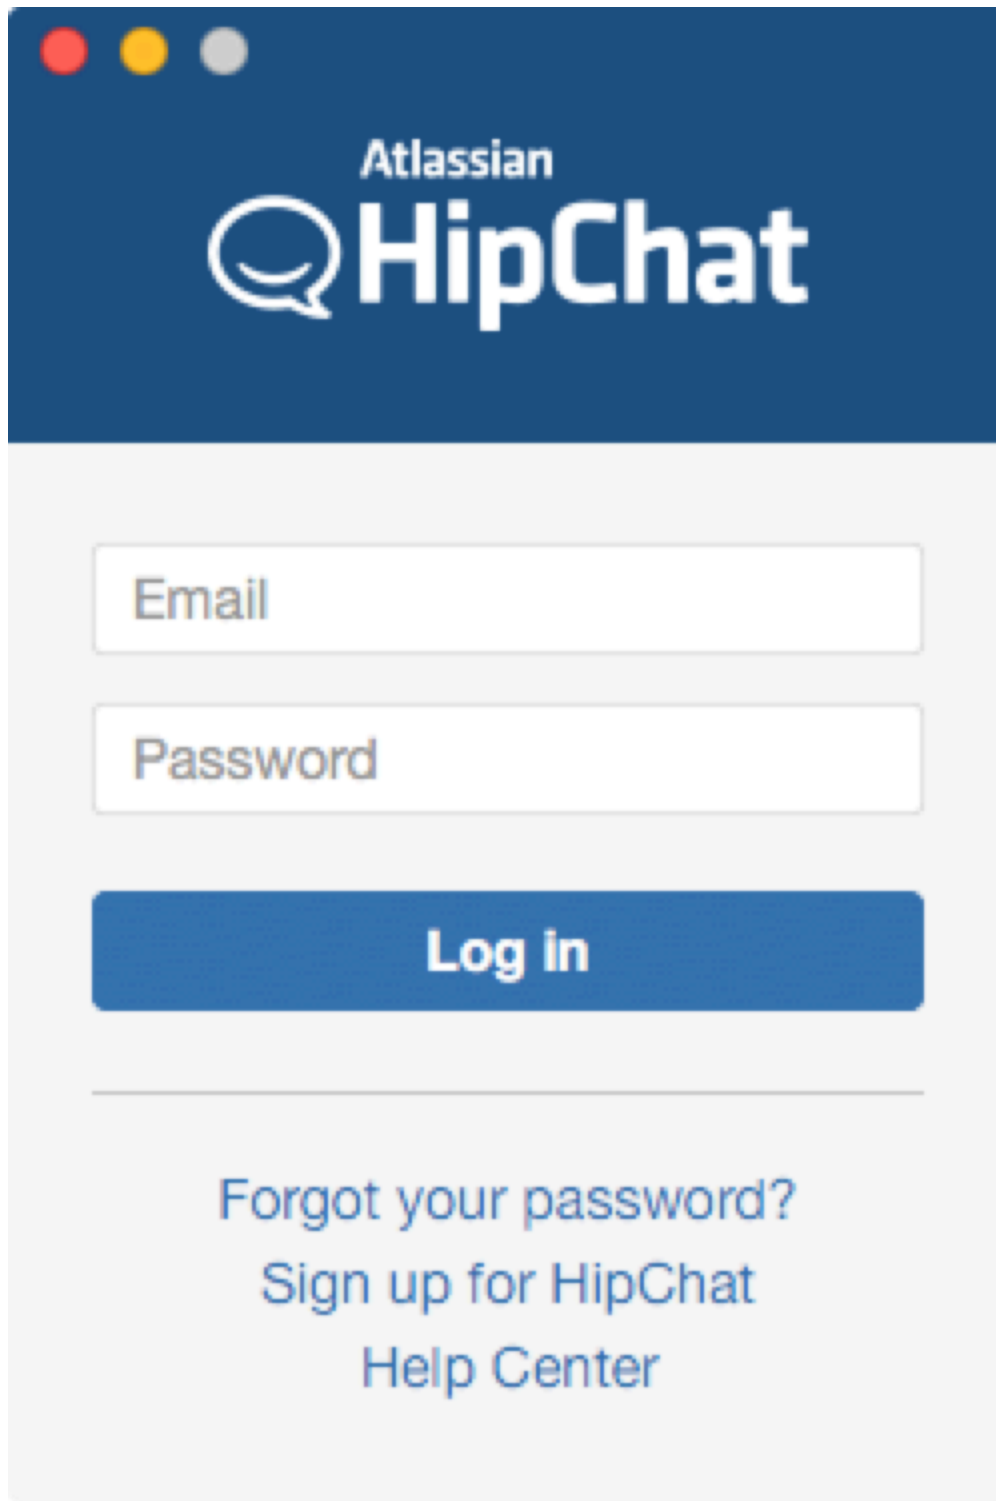

The image shows a login window for Atlassian HipChat. It has a dark blue header with the Atlassian logo and the word 'HipChat' in white. Below the header, there are two white input fields with rounded corners, labeled 'Email' and 'Password'. Underneath these fields is a blue button with the text 'Log in' in white. Below the button is a horizontal line. Under the line, there are three lines of text: 'Forgot your password?', 'Sign up for HipChat', and 'Help Center', all in a blue color.

Atlassian  
**HipChat**

Email

Password

**Log in**

---

[Forgot your password?](#)  
[Sign up for HipChat](#)  
[Help Center](#)

## Related articles

- [How to configure Hipchat](#)

